



MODEL: GT-BD06B

Oder Code	GT-BD06B
LED	10W/Pcs Cree
Row	Dual Row
Operating Voltage	10-30V DC
Operating Temp	-40~+80 °Celcius
Beam Pattern	Flood, Spot, Combo
ColorTemperature	6000K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Coating Powder	Semi-Gloss Black
Mounting System	304 Stainless Steel Side Mount /Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	Ip67
EMC Protection	ECE R10, CISPR 25 Class 3

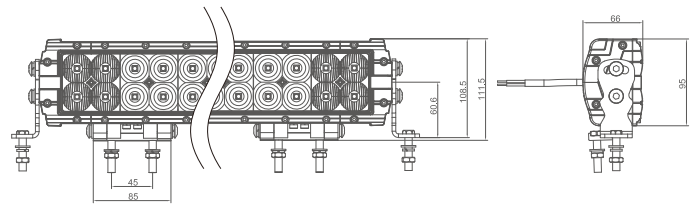

Plastic Decorative Part:
Different Colors Are Available



MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BD06B-8L	7.00"	80W	4.67A@12V, 2.34A@24V	8PCS*10W Cree	9600Lm	600mm	1.20Kg/Pcs	4Pcs/Carton
GT-BD06B-12L	9.46"	120W	7.00A@12V, 3.50A@24V	12PCS*10W Cree	14400Lm	600mm	1.60Kg/Pcs	4Pcs/Carton
GT-BD06B-16L	12.00"	160W	9.30A@12V, 4.67A@24V	16PCS*10W Cree	19200Lm	800mm	1.90Kg/Pcs	4Pcs/Carton
GT-BD06B-20L	14.50"	200W	11.67A@12V, 5.83A@24V	20PCS*10W Cree	24000Lm	800mm	2.20Kg/Pcs	4Pcs/Carton
GT-BD06B-24L	17.00"	240W	14.00A@12V, 7.00A@24V	24PCS*10W Cree	28800Lm	800mm	2.50Kg/Pcs	2Pcs/Carton
GT-BD06B-28L	19.50"	280W	16.30A@12V, 8.17A@24V	28PCS*10W Cree	33600Lm	900mm	2.80Kg/Pcs	2Pcs/Carton
GT-BD06B-32L	22.00"	320W	18.67A@12V, 9.30A@24V	32PCS*10W Cree	38400Lm	900mm	3.10Kg/Pcs	2Pcs/Carton

